



OWNER'S MANUAL

For: NC-2 L Electrical Rating: 120 V ~ 60 Hz 3 A

CONGRATULATIONS!

You have just purchased NeverClog™, an air conditioning drain line maintainer. This device ends AC condensate drain line clogs with daily automated cleaning of your drain line, keeping your AC running more efficiently and free of Zooglea, a type of bacteria that is the main culprit behind these clogs. It also stops bugs, lizards, other critters, and debris from making its way into your home from your exterior AC drain line.

Please read this manual carefully before operating. The machine model and serial number can be found on the side of your vac. You should register both the model and serial numbers on our website and keep them in a safe place for future reference.

Instructions will always be available online and we are available for questions via text or phone.

CONTENT

Important Safety Instructions

Product Description

Polarized Connection

Warning

Warranty

General Maintenance

Cleaning the Tank

Trouble Shooting

IMPORTANT SAFETY INSTRUCTIONS

This NeverClog™ is for domestic use only; it is designed to be used for maintaining AC drain lines on a set schedule.

When using NeverClog™, basic precautions should be followed.

Read all instructions before using this NeverClog™ device.

1. This device is not intended for use with flammable liquids such as gasoline, or in environments where flammable substances are present.
2. Use the NeverClog™ only as described in this manual. Only use attachments that are provided or sold by the manufacturer.

3. If the unit needs to be unplugged, the switch must be turned off first.

4. Do not put any objects into any openings. Do not use with any openings blocked.

5. Do not allow this device to be used as a toy. It is designed solely for the intended purpose of maintaining AC drain lines on a set schedule.

6. Do not use it if it has any damaged parts. This includes: cords, connectors, plugs, smart devices, timers, or any others. Call support for assistance.

7. Do not allow the NeverClog™ to be used as a toy.

8. Never pull by the cord, use the cord as a handle, or pull cord around a sharp edge or corner. Keep away from heated surfaces.

9. Do not submerge NeverClog™ in any liquid.

10. Keep hair, clothing, fingers, and all body parts away from openings and moving parts.

11. Never use NeverClog™ as a pump.

12. If line cord is damaged it must be replaced by an authorized service center.

13. Connect to a properly grounded outlet.

14. Rinse out the tank every 3 months for optimal performance.

Product Description

A. Holding Handle

B. ON / Off Switch

C. Motor Head

D. Suction Port

E. Tank

F. Exhaust Port

G. Flexible Hose

I. Manifold

J. Smart Plug / Timer

K. Wall Mount

Figure A



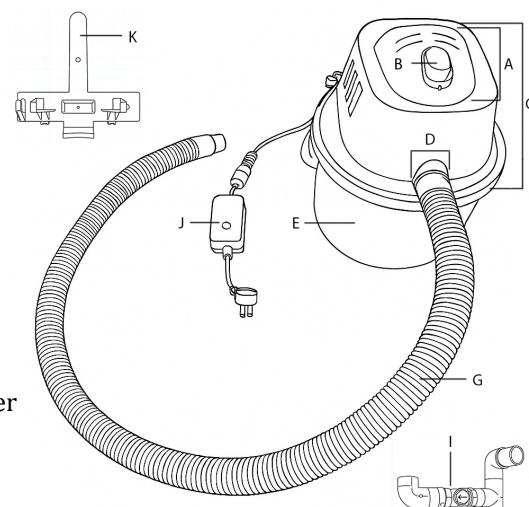


Figure B

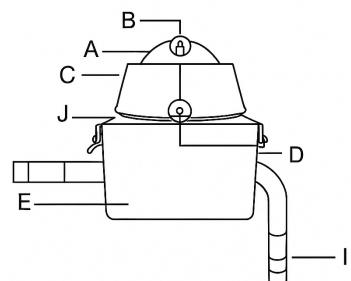

POLARIZED CONNECTION

Figure C

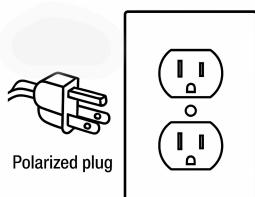

NOTE:

This appliance is for use on a 120 V~ circuit, and has a polarized plug as shown in figure C. A temporary adapter may be used to connect this plug to a non-polarized outlet. Temporary adapters should be used only until a properly polarized outlet can be installed by a qualified electrician.

NOTE: In Canada, the use of a temporary adapter is not permitted by the Canadian Electrical Code.

WARNING

Check with a qualified electrician or service person if you are in doubt as to whether the outlet is properly grounded. Do not modify the plug provided with the appliance if it does not fit the outlet. Instead, have a proper outlet installed by a qualified electrician.

WARNING:

Always unplug the vacuum from the outlet before performing any maintenance.

To avoid injury from accidental starting, **ALWAYS** unplug the power cord before working on or touching the NeverClog™ device.

To assure product **SAFETY AND RELIABILITY**, repairs and adjustments should be performed by a NeverClog™ Service Center, always using NeverClog™ replacement parts.

INSTRUCTIONS

1. In Figure 1 - Fasten the locks on the side of the vacuum head with the tabs on the sides of the tank.

Figure D


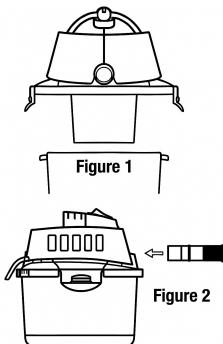


Figure E

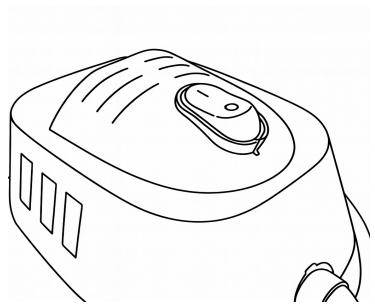

2. Plug the smart plug into your outside outlet.
3. Turn on the NeverClog™ to determine which port is the suction port. Then, press the hose end into the suction port, as shown in Figure 2.
4. Leave the power button in the ON position (as shown in Figure E). Then, use the button on the smart switch (as shown in Figure A) to turn the device off. The timer or smart switch will now control whether the vacuum is on or off. The NeverClog™ is now ready for use.

5. To disconnect the hose from the vacuum cleaner, take it from the connected end, make a half-turn, then pull it out.

Note: If the AC unit has a condensation pump, the area where the drain pipe meets the PVC pipe must be caulked or filled to guarantee suction

To avoid injury to bystanders, keep them clear of blowing debris. The operation of any utility device can result in foreign objects being blown into the eyes, which can result in severe eye damage. Always wear safety goggles.

WARRANTY

This warranty gives you specific legal rights, and may also have other rights that vary from state to state, province to province, or country to country.

Warranty coverage ends when the product becomes unusable for reasons other than defects in workmanship or material for a period of 5 years for domestic use. Limited warranty against manufacturing defects.

THIS WARRANTY SHALL NOT APPLY to any products or parts thereof which have been damaged by tampering, misuse or abuse or which have been altered or repaired by an unauthorized person or service center.

THIS WARRANTY SHALL NOT APPLY to brushes or accessories since their life depends upon the amount of use.

FOR REPAIR the inoperative machine must be delivered with shipping and delivery charges prepaid together with satisfactory evidence of the purchase date to an authorized service center.

NeverClog™ will either repair or replace, at its selection, all defective machines during the warranty period.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty is the sole and exclusive warranty for NeverClog™ products. No employee, agent, dealer, or other person is authorized to alter this warranty or make other warranty on behalf of NeverClog™.

The foregoing obligations are in lieu of all other obligations and liabilities including negligence and state NeverClog™'s entire and exclusive liability and the purchaser's exclusive remedy.

NeverClog™ will in no event be liable for any direct, indirect, special, incidental or consequential damages or losses whatsoever. NeverClog™'s liability under no circumstances will exceed the contract price for the goods or parts for which liability is claimed.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

GENERAL MAINTENANCE

To keep your NeverClog™ looking its best, clean the outside with a cloth dampened with water and mild soap every 3 months.

To clean the tank:

1. Dump out residual debris.
2. Wash the drum thoroughly.
3. Wipe out with dry cloth.

CLEANING THE TANK

1. Unplug power cord.
2. Remove the hose.
3. Unlock the side latches shown in Fig 1 and pull basket down
4. Fig 2 - Place the cover upside down on a clean surface.
5. Rinse the tank and flap valve before reconnecting the basket.




Figure F





Fig. 2



Trouble Shooting


Suction does not start – Possible cause not firmly Plugged in – Possible solution – Plug in firmly

Low suction – Possible cause – Obstruction in hose – Possible solution – take hose off and blow out / rinse out until clear


Low Suction – Possible cause – Motor head not installed correctly to the basket – Possible solution – make sure the motor head is seated properly on the tank.

What's Included


NeverClog™ unit with Smart Life waterproof plug

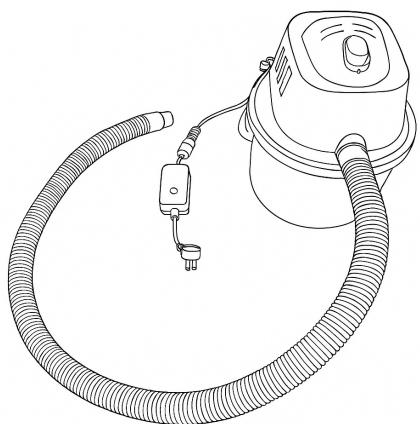

Manifold - Mounts to exterior drain line

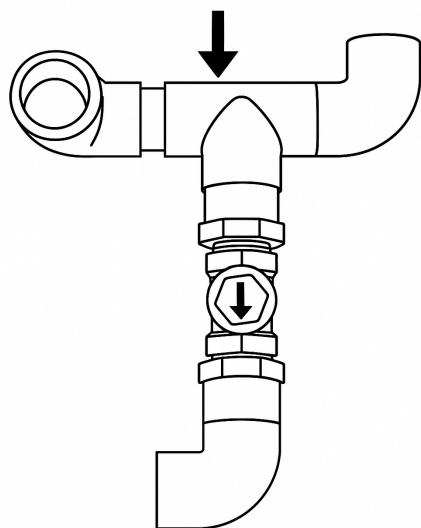

Wall Mount -

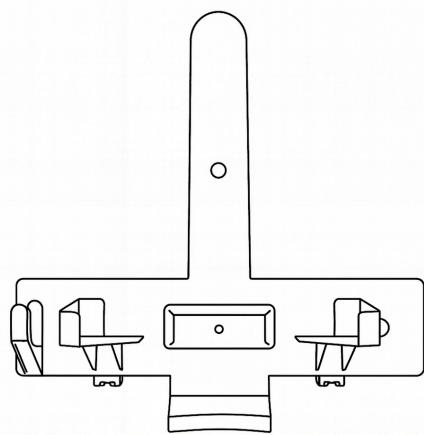

HVAC Technology Solutions

1815 Savannah Springs Dr

Franklin, TN 37064 U.S.A.

Tel:(239)677-7250

U.S. Patent Numbers

US D 467,693S, US D467,694S,

US D 468,499S, US D470,633S.

Other patents pending.

Visit our website www.hvactechnologysolutions.com